


R:\Utilstods\City_Std_Details\Wtr_Quality_Details\Q_70_StormDrainMessageLayout.DWG

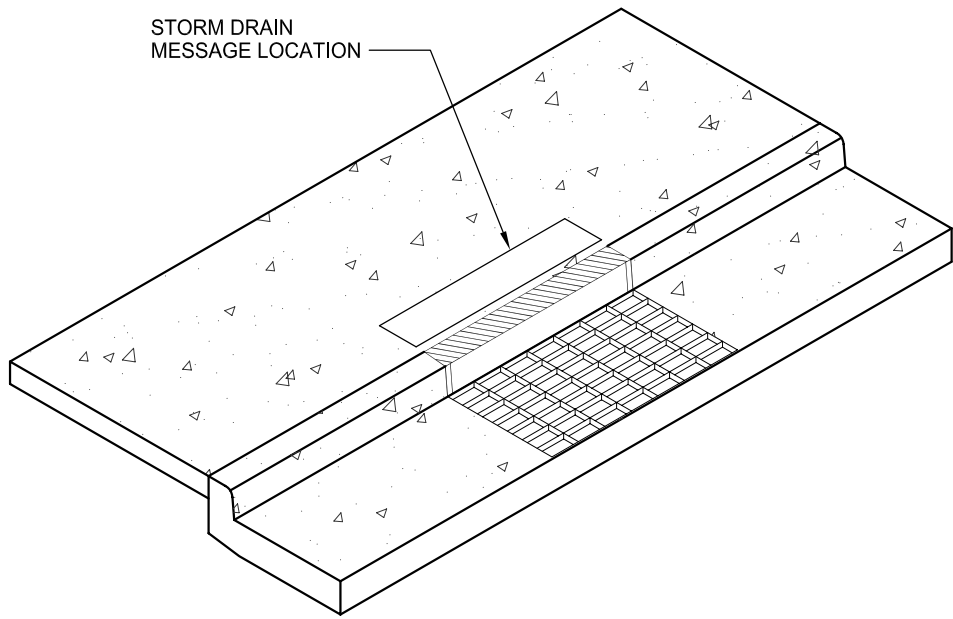

NO DUMPING!
FLWS TO RIVER 

NO DUMPING!
FLWS TO CREEK 

NO DUMPING  **I LIVE**
DUMPING **DOWNSTREAM**


NOTES:

1. STORM DRAIN MESSAGE SHALL BE APPLIED IN SUCH A WAY AS TO PROVIDE A CLEAR, LEGIBLE IMAGE.
2. STORM DRAIN MESSAGE SHALL BE PERMANENTLY APPLIED DURING THE CONSTRUCTION OF THE CURB AND GUTTER USING A METHOD APPROVED BY THE LOCAL AGENCY.
3. FOR AREA DRAIN INLETS, STORM DRAIN MESSAGE SHALL BE PLACED ADJACENT AND PARALLEL TO THE LONG AXIS OF THE DRAIN.
4. LETTERS SHALL BE 1-1/2" IN HEIGHT. DIMENSIONS OF STORM DRAIN MESSAGE SHALL NOT EXCEED 12"x33".
5. IF THE MESSAGE IS STAMPED IN CONCRETE, THE DEPTH SHOULD BE APPROXIMATELY 0.25".
6. IF AN ALTERNATIVE STORM DRAIN MESSAGE IS PROPOSED, IT SHALL BE APPROVED BY THE LOCAL AGENCY.

REV.	DATE	DESCRIPTION
△		
△		
△		

CITY OF SACRAMENTO
 DEPARTMENT OF UTILITIES

STORM DRAIN
MESSAGE LAYOUT

APPR'D BY:  NO SCALE
 DATE: MAY 2007 DWG. NO. **Q - 70**