



**BALE CONFIGURATION**

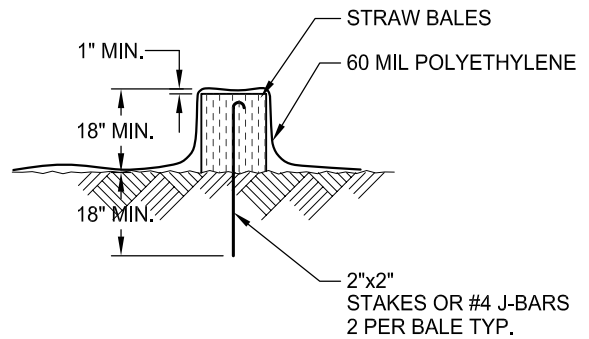

**SECTION A-A**

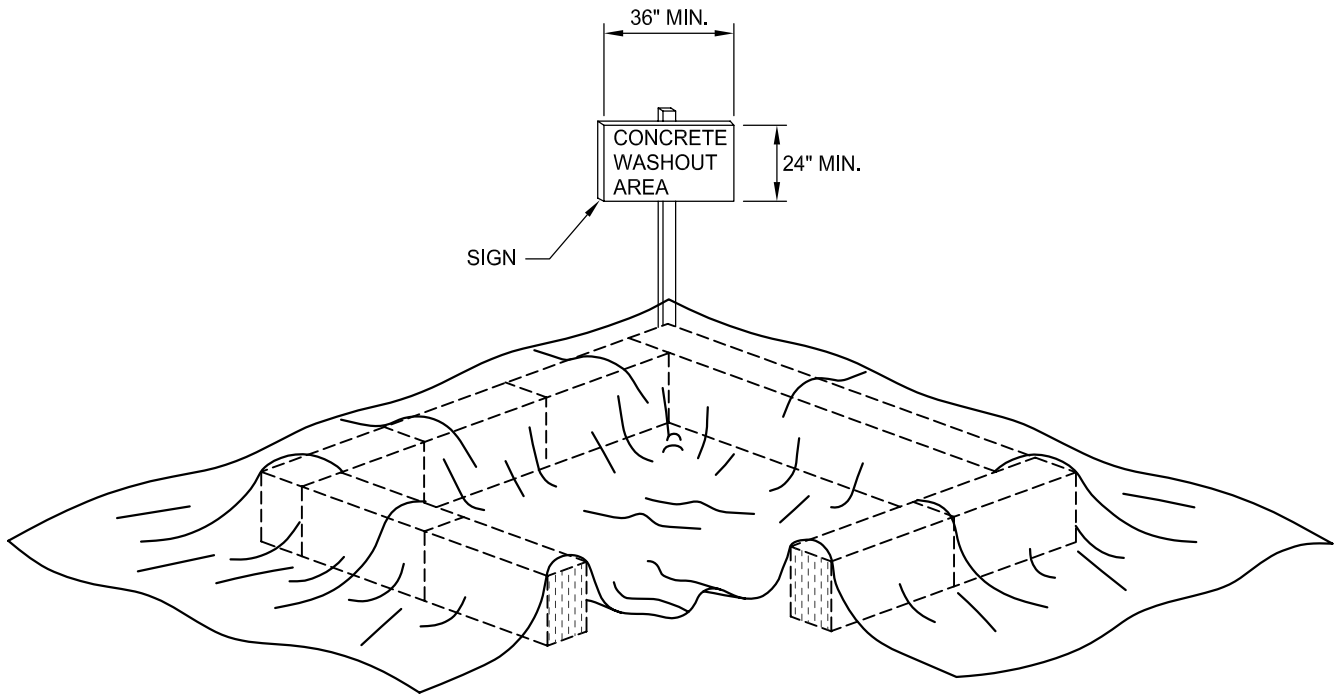

THIS SECTION REMOVED FOR GRAPHICAL  
REPRESENTATION ONLY. STRAW BALE  
PERIMETER SHALL BE CONTINUOUS.

**NOTES:**

- 1.- FACE SIGN TOWARD NEAREST STREET  
OR ACCESS POINT
- 2.- CONCRETE WASHOUT SHALL BE LOCATED  
BEHIND CURB AND 50 FT. MINIMUM FROM  
DRAINAGE INLETS OR WATERCOURSES

REV.	DATE	DESCRIPTION
△		
△		
△		

**CITY OF SACRAMENTO**  
DEPARTMENT OF UTILITIES

**CONCRETE WASHOUT**

APPR'D BY: *DOB* NO SCALE  
DATE: MAY 2007 DWG. NO. **Q - 80**